24"
30"
36"

1.5" dia.

Type:	Qty:	Project:

SWB1.5- | **SWAB PENDANT 1.5" Diameter**

Length Nominal length in inches and driver wattage.

24	24"
30	30"
36	36"
C___	Custom Length

Diffuser

FR	Frosted Acrylic, 1.5" diameter

Color Temperature

27K	2700°K
30K	**3000°K**
40K	4000°K
CK__	Custom Kelvin (contact factory)

Output

4.4W	4.4W/FT

Control (REMOTE DRIVER)

N	Non-Dimmable
010	0-10V Dimmable Driver (120v-277v)
ELV	ELV Triac Dimmable Driver (120v-277v)
5in1	5-in-1 ELV/0-10V Dimmable Driver (120v-277v)
DAL	Dali Dimming
LUT	Lutron Ecosmart Dimming (consult factory)

Mounting

CS4	Cable Suspension (4ft)
CS__	Cable Suspension (custom length)

Finish: Housing Cap, Canopy and Powerfeed Color

AL	Natural Aluminum
WH	White
BK	Black
CC	Custom RAL color (consult factory)

APPLICATIONS > The SWAB 1.5" diameter Pendant provides 360° diffuse illumination for a variety of indoor applications as a single use accent or in multi-pendant groupings.

 The SWABs unobtrusive 4" high fixture cap tops a softly frosted acrylic tube, fully illuminating the diffuser from the top to the base. Minimal, sophisticated styling for any application: Hospitality, Corporate Offices, High-End Residential, Retail, Atrium, Restaurant and Entertainment Venues.

LED > 4.4W/FT, 90+ CRI, 2700K, 3000K or 4000K, 24V.

CONSTRUCTION > SWAB is constructed of high-grade, low-copper aluminum top cap, powdercoated. 1.5" diameter frosted acrylic tubing. All electrical components are installed, wired and 100% tested prior to shipping.
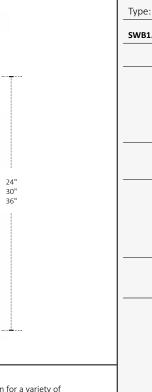
MOUNTING > Standard cable length 4'-0". For longer lengths consult factory.

FINISH > 5-stage pre-treatment process with a polymer primer sealer, oven baked and top-coated with thermoset super TGIC polysester powdercoat finish. [BK] = black powercord, standard 5" round black canopy and black housing cap. [WH] = white powercord, canopy and cap. AL = silver-toned powercord, natural aluminum canopy and natural aluminum housing cap.

DRIVERS > Drivers provided are remote. Fixture to be wired with UL listed electrical components for standard Class II low voltage equipment.

RATED > Suitable for Dry/Damp location.

WARRANTY > 5 years.

90CRI | 24vDC | 100% 1% DIM | UV IR | LEAD MERCURY | Dry/Damp | 5 YEARS WARRANTY