

Type: Qty: Project:

RD1.5	RAIN DROP 1.5" diameter
	Single Fixture or Array Quantity with custom canopy
----	Single Fixture Only (skip, no entry)
AR _____	Custom Array. Enter quantity.
	Diffuser
FA	Frosted Acrylic Solid Rod
	Color Temperature
27K	2700°K
30K	3000°K
40K	4000°K
50K	5000°K
RGBWW	Red/Green/Blue/27K/65K
	LED Output
2W	2 Watts/per pendant (RGBWW only)
6W	6 Watts/per pendant (single color)
	Control
N	Non-Dimmable
ELV	ELV Triac Dimmable Driver (120v-277v)
DMX	DMX (required for RGBWW)
	Mounting
CS4	Cable Suspension (standard 4ft lengths)
CS _____	Custom cable lengths (contact factory for array)
CAT	Custom Catenary System (contact factory)
	Finish
BA	Black Anodized Aluminum
CC	Custom finish (contact factory)
	Options
EXT	Exterior/Wet location

APPLICATIONS > The RAINDROP Mini-Pendant provides 360° diffuse illumination for a variety of indoor applications as a single use accent or multi-pendant chandelier. Or have ASCENTI design a fully customized cascade of raindrops, as in this project that flows down the entry stairway, gracefully accenting the front glass façade. This ASCENTI WORLD of ONE chandelier included a custom 18ft long canopy and 125 individualized cable lengths. The sky is the limit with this versatile luminaire.

The RAINDROP's unobtrusive 1.32" high fixture cap tops a solid, softly frosted acrylic rod, fully illuminating the diffuser from the top to the bottom of its 12.32" form. Minimal, sophisticated styling for any application: Hospitality, Corporate Offices, High-End Residential, Retail, Atrium, Restaurant and Entertainment Venues.

LED > VIVIO™ LED Photon Series offers numerous choices in the latest LED technology. Single Kelvin temperatures range from 2700K to 5000K at 6W. Our COB RGBWW (5-in-1 Red-Green-Blue-Double White) provides *two* additional white LEDs, one warm white and one cool white, achieving a wider color spectrum. 2W, 90+ CRI, Range: 6500K to 2700K, 24V.

CONSTRUCTION > RAINDROP Mini-Pendant is constructed of high-grade, low-copper, machined aluminum top cap and canopy connector. 1.5" diameter frosted acrylic rod. All electrical components are installed, wired and 100% tested prior to shipping.

MOUNTING > Cable Suspension [CS] utilizes black powercord, standard cable length 4'-0". For longer lengths consult factory. Custom 6-wire cord for RGBWW. The 0.45" Dia. x 0.75"H ceiling connector installs into a standard single canopy. Custom arrays with canopies or catenary systems are a custom WORLD OF ONE ASCENTI luminaire, submittals are required. ASCENTI to provide complete Shop Drawings with dimensioned layout and pendant placement diagram.

FINISH > Black anodized finish.

DRIVERS > Drivers provided are remote, Class II type. Quantity varies as per array, cord length and wattage.

RATED > Suitable for Dry/Damp location. Specify wet location.

WARRANTY > 5 years.

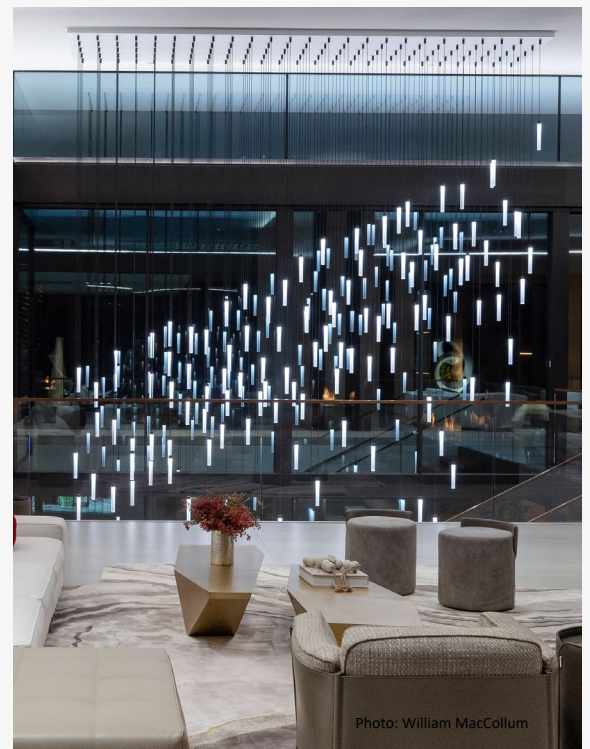


Photo: William MacCollum



Mod.Apr.25.2024